


E2 Hinged Door Cabinets

Vandal resistant
Flush fitting doors
Variety of locking mechanisms
Plinth mounted or surface/wall mounting available
Radiused corners eliminates sharp edges
Fully lined door aperture
External grade 12mm fuse board
IP65 Rated door seal with IP42 ventilator
Galvanised + painted grey to RAL 7031, also texture
painted Black or Green to BS 4800 14C 39 or quotations
for other RAL numbers
Available pre-wired if requested
Haldo Pillar



Specifications

Fabricated from 3mm mild sheet steel
Hot dipped galvanised finish to BS EN ISO 1461
Fitted with fuse board and earth terminal
Stainless steel earth terminal and earth strap
between cabinet and door
Plinth mounted or surface/wall mounting
Flush door hinges secured with stainless steel
pins and
nylon bushes
EDPM Door seal 20mm wide x 10mm thick
12mm External grade plywood fuse board
Standard locks supplied are Cam Locks, Compression Tri-lock,
Barrel Lock, O Lock and Tri Cam Lock, others
available on request
5mm Galvanised steel version available on
selected models
All E2 pillars available painted Grey, Black or Green
as standard
additional colours also available

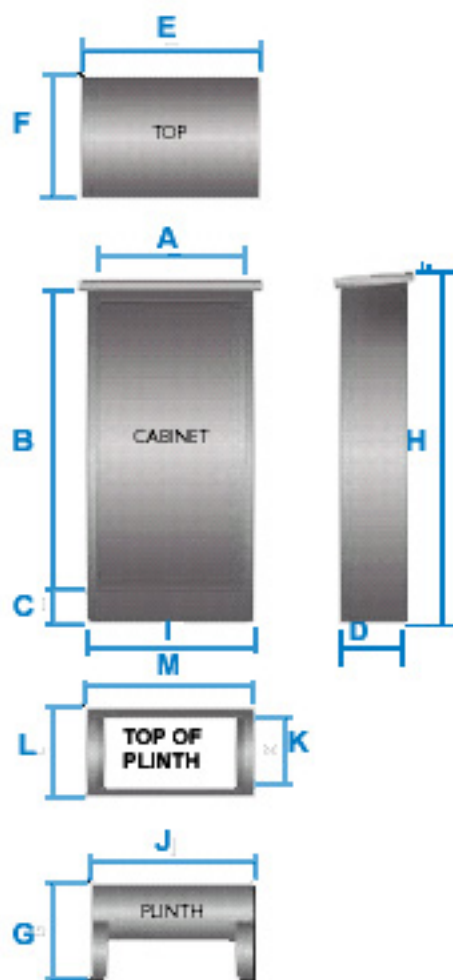

Product	A	B	C	D	E	F	G	H	I	J	K	L	M	Fuse board		International Dimensions		
														Height	Width	Height	Width	Depth
Haldopillar 610	610	844	100	306	712	327	350	1020	706	610	844	100	306	712	327	350	1020	706
Haldopillar 510	510	744	100	256	612	277	350	920	606	510	744	100	256	612	277	350	920	606
Haldopillar 410	410	594	100	206	512	227	350	770	506	410	594	100	206	512	227	350	770	506
Haldopillar 210	210	594	100	206	312	227	350	770	306	210	594	100	206	312	227	350	770	306