


PWS 1500

The PWS 1500 is designed to provide ease & reliability for the customer & rapid information transfer to the road user. Low energy / high output LED light output means that the sign can work from **solar** powered batteries in all climates.

Each LED is separately encapsulated in a lens giving better output & quality of text.

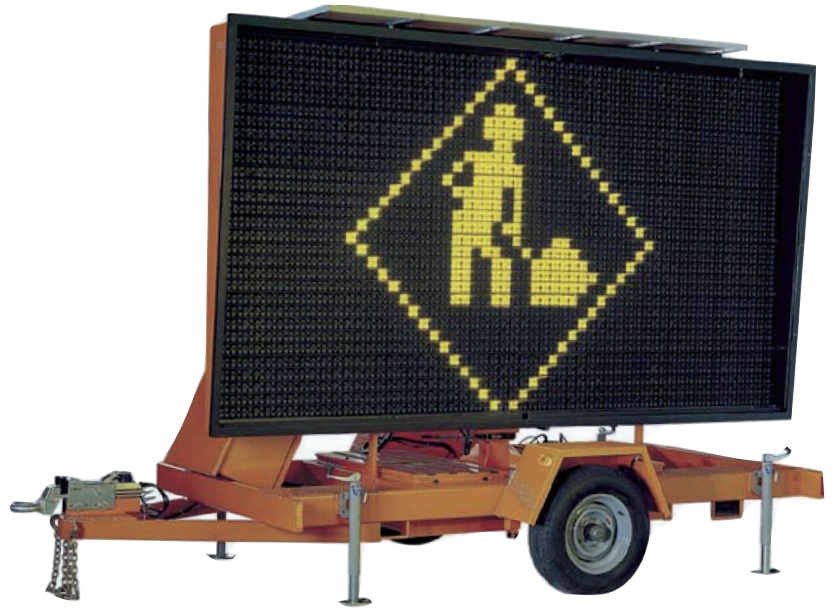

Features

- Solar powered
- Green Energy
- Portable
- Plug & play
- 55 password capacity (4 levels)
- 600 Messages with 99 different sequences
- NTCP compliant protocol
- 15 brightness levels
- Time commands
- Unique LED's
- Free upgrade program
- Built to last

Benefits

- No running costs, No engine to maintain, No noise, No pollution
- Promotes the image of the user
- Instant solution wherever the application is needed.
- Problem free maintenance
- Password protection permits the user and supervisor to access only the control function they need to perform their job
- Create the messages that you need in the language of your choice, one line, two line, three lines, corporate logos etc. International Traffic symbols included
- Instant recall of messages for particular traffic solutions / safety plan. User friendly Quick programming, No computer expertise is required. Can be networked with other systems
- No light pollution, Energy efficient
- The sign can be programmed 365 days in advance
- Each LED (4 per pixel) is separately encapsulated in a lens to give extra clarity & output
- Your software will always be the latest issue.
- Case aluminium, weather seal to insure watertight integrity - Easy to clean, Solar tinted clear polycarbonate.

Specifications

Benefits

Overall length:	460 cm
Overall width:	218 cm
Display panel:	198cm x 332 cm
Panel construction:	Aluminium
Travelling height:	297 cm
Operating height:	434 cm
Weight:	1723 kg
Coupler:	76 mm pintle eye
Brake actuator:	3402 kg
Axle/suspension:	2494 kg
Brake:	Hydraulic

Display

Full Matrix Capable & 3 lines text
8 characters. 4 LEDs in optical lens
per pixel. 30 x 48 pixels*

Programming

On-site using unit keyboard or laptop.
Remotely programmable from your own
PC with cellular option

Solar Power

Various configurations of solar panels and
batteries are available with Solar regulator
and battery surcharge protection

Features

200 user-programmable messages
300 pre-programmed messages
50 user-programmable pictograms
50 pre-programmed pictograms
99 message sequence capacity
50 password capacity (4 levels)
15 brightness levels
Languages: Of your choice

Options

Cellular Modem Connection
Radar
Data Logging - Statistics
Rotating Solar Panels
GPS
55 amp battery charger
Adjustable pintle hitch
50 mm coupler or 59 mm coupler
8 8D batteries
120 volt AC connection
Electric brakes

**Ask about other message boards
or tell us your special needs.
We custom-build on request!**

* **Larger Model Available 1500C**
30x56 Pixels 12 characters.
Display panel 204 x 363cm



www.pwssigns.com
info@pwssigns.com