



## PWS Signs Ltd

Ravensdale,  
Unit 10 Northlink Business Park,  
Coes Road, Dundalk, Co. Louth,  
A91 WV09  
Tel: (042) 937 5010

## PWS Ireland Ltd

Greenbank Industrial Estate,  
Newry, Co. Down,  
BT34 2QX  
Tel: (028) 3026 4511

✉ [info@pwssigns.com](mailto:info@pwssigns.com)  
➡ [www.pwssigns.com](http://www.pwssigns.com)

# Flecta Impact Resistant Bollard



The Flecta Impact Resistant Bollard is a highly visible, retro-reflective self-righting bollard perfect for traffic and commercial applications — cost-effective, robust and passively safe.

## Key Features

- **Passively Safe**  
EN12767 (100N:E4)
- **Fully Compliant**  
BS8442 Pt 14
- **Survives Multiple Impacts**
- **Side Wings for Excellent Visibility**
- **Fluorescent Diamond Grade**  
DG3 material from 3M
- **12 Year Delamination & Anti-Crease Guarantee**
- **Low Maintenance**  
Easy to Clean & Maintain
- **Available Single** (Flecta) or **Double Sided** (Flecta Plus)
- **Variations of sign faces available**  
Keep Left, Keep Right, No Entry etc


## Details

The Flecta Impact Resistant Bollard is a robust, passively safe bollard which is fully compliant with BS8442:2014. Flecta Bollards offer unsurpassed visibility thanks to the use of 3M Diamond Grade DG3 Fluorescent Yellow Grade Microprismatic reflective sheeting.

They have been crash tested in accordance with EN 12767:2007 "Passive Safety Support Structures for Road Equipment" and are rated 100NE4 - the highest possible rating. Incorporating a patented base system, the bollard is able to withstand multiple impacts and the unique anti-twist mechanism ensures correct realignment with the traffic following a collision. These passive safety features along with quick and easy installation and low onward maintenance help the Flecta Bollard improve safety for all road users.



Available single or double sided

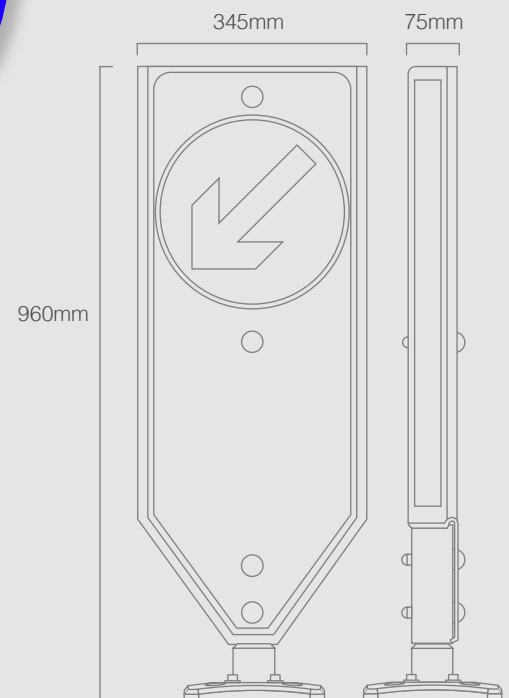

|                       |                            |
|-----------------------|----------------------------|
| Overall Height        | 960mm                      |
| Width                 | 345mm                      |
| Keep Left/Right Arrow | 300mm Dia                  |
| Colour                | Grey/Black/White           |
| Fixing                | 4 Bolts or foundation cage |